

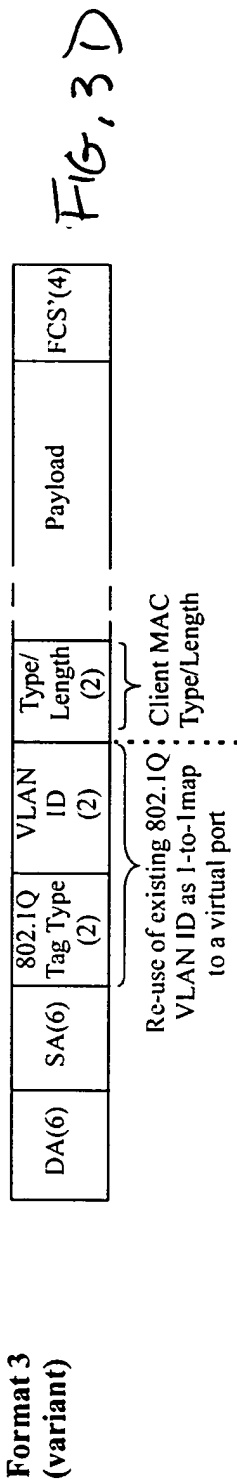
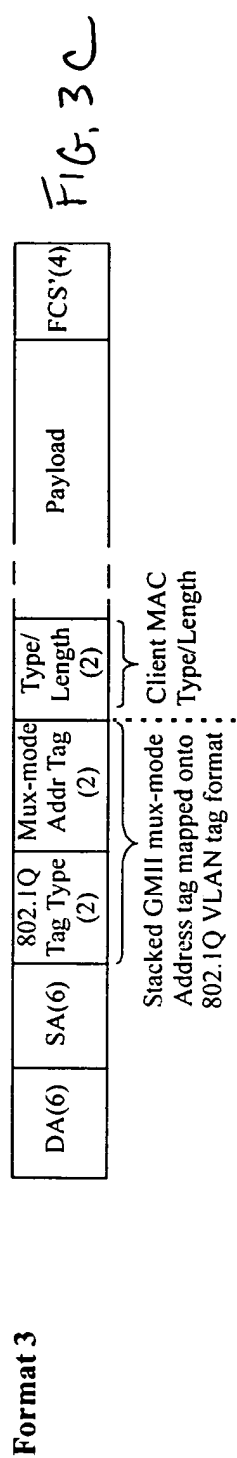


FIG. 2

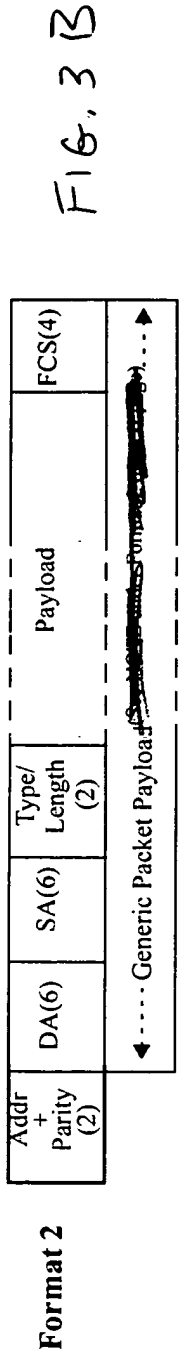



**Format 3 (VLAN-style Address mapped on "Tag Control Information")**

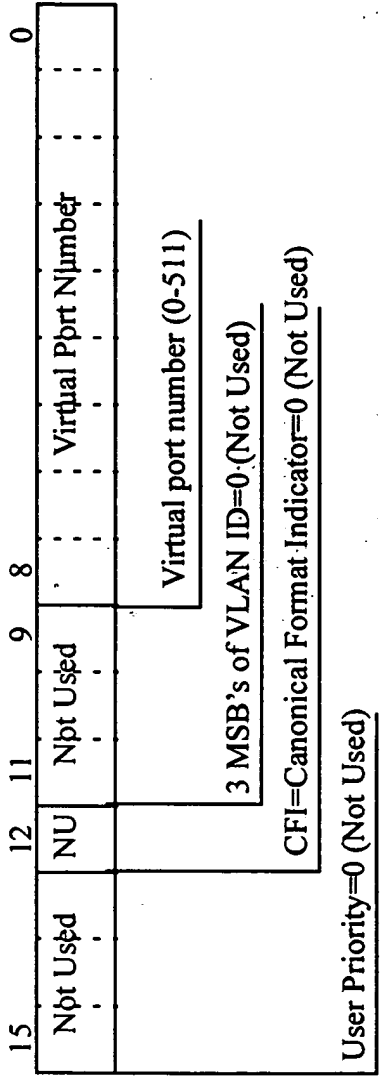


FIG. 5

Format 3 Variant (1-to-1 mapped VLAN ID on "Tag Control Information")

15	12	11	9	8	0
User Priority	CFI	:	:	VLAN ID = Virtual Port Number	:
				Virtual port number (0-511)	
				Canonical Format Indicator (Not Used, Ignore)	
				User Priority (Not Used, Ignore)	

FIG. 6

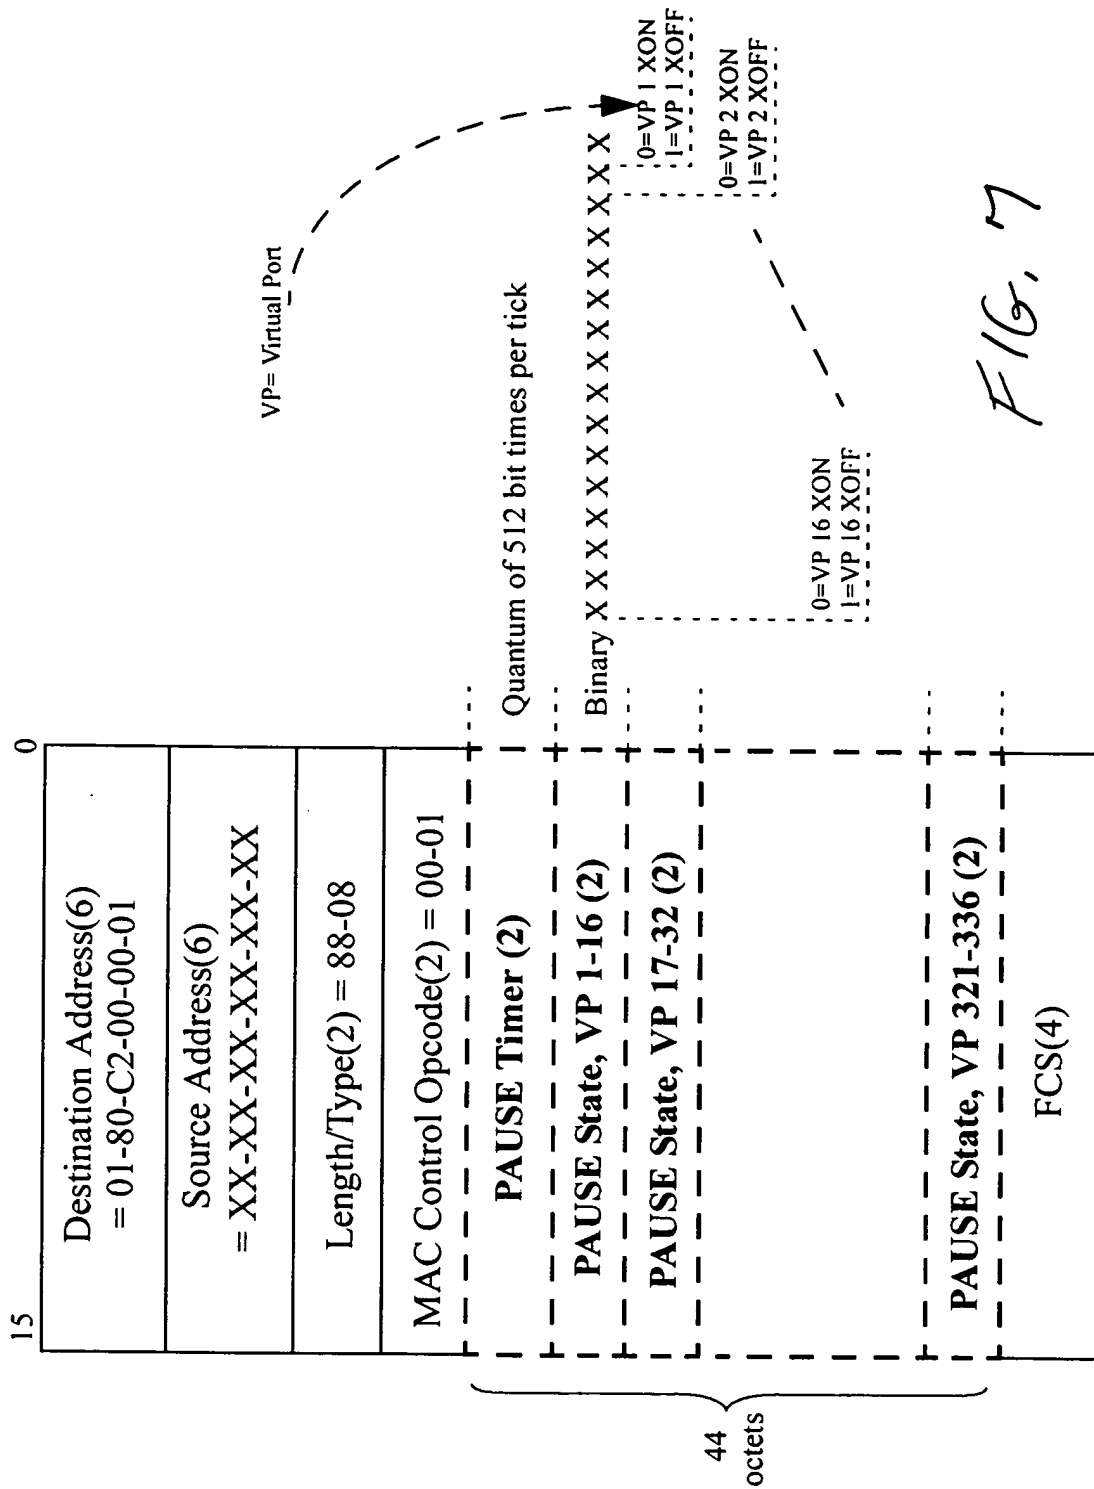


FIG. 7

Layer-2/3 NPU  
MAC client

EoS Framer/Mapper  
MAC client

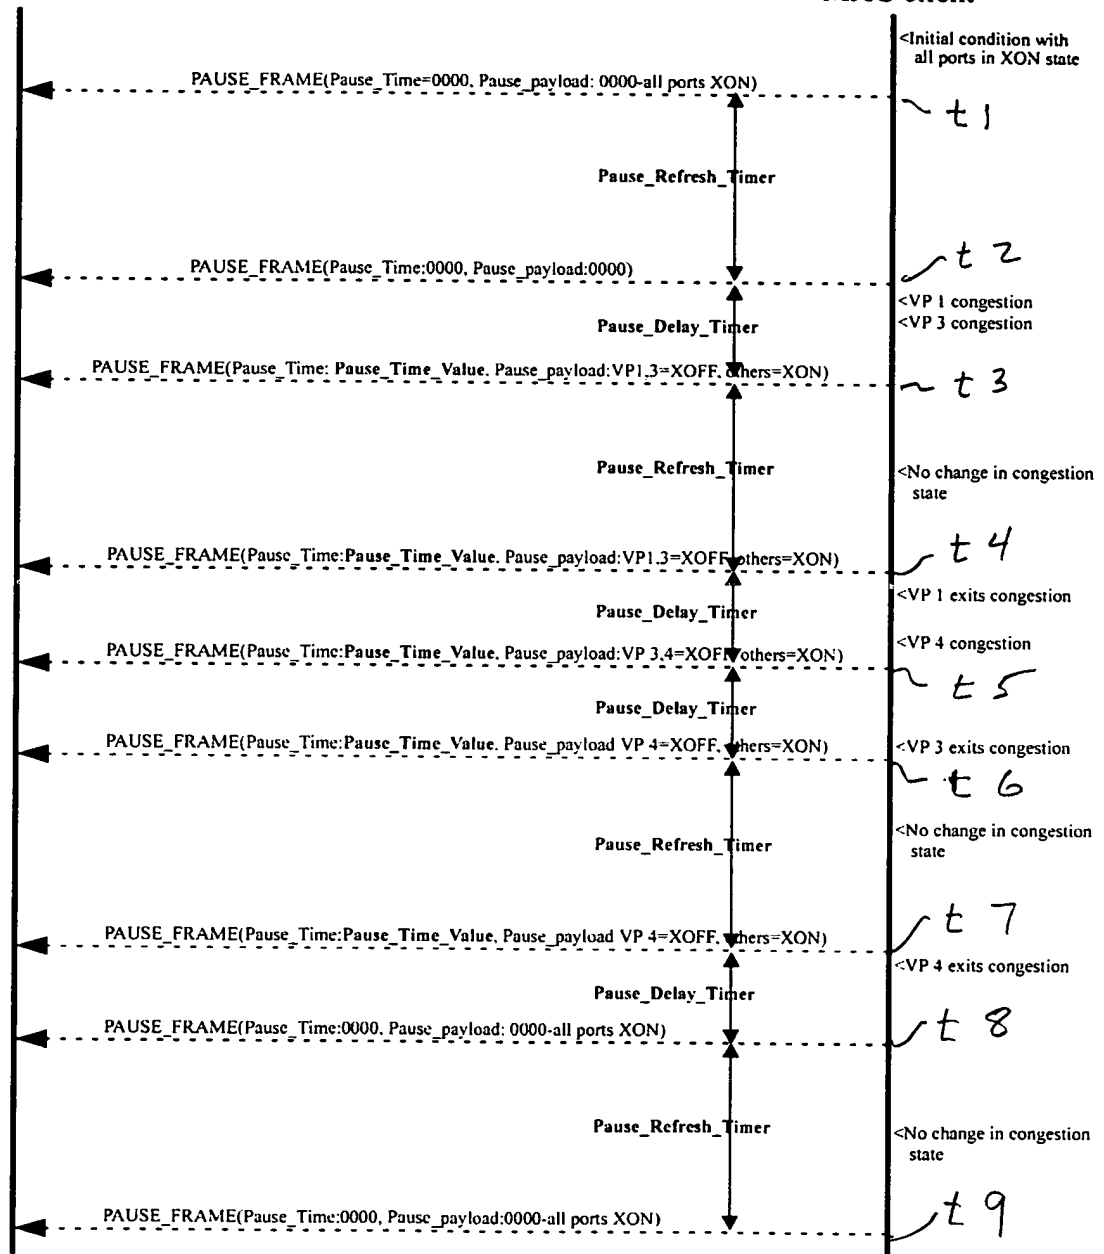


FIG. 8



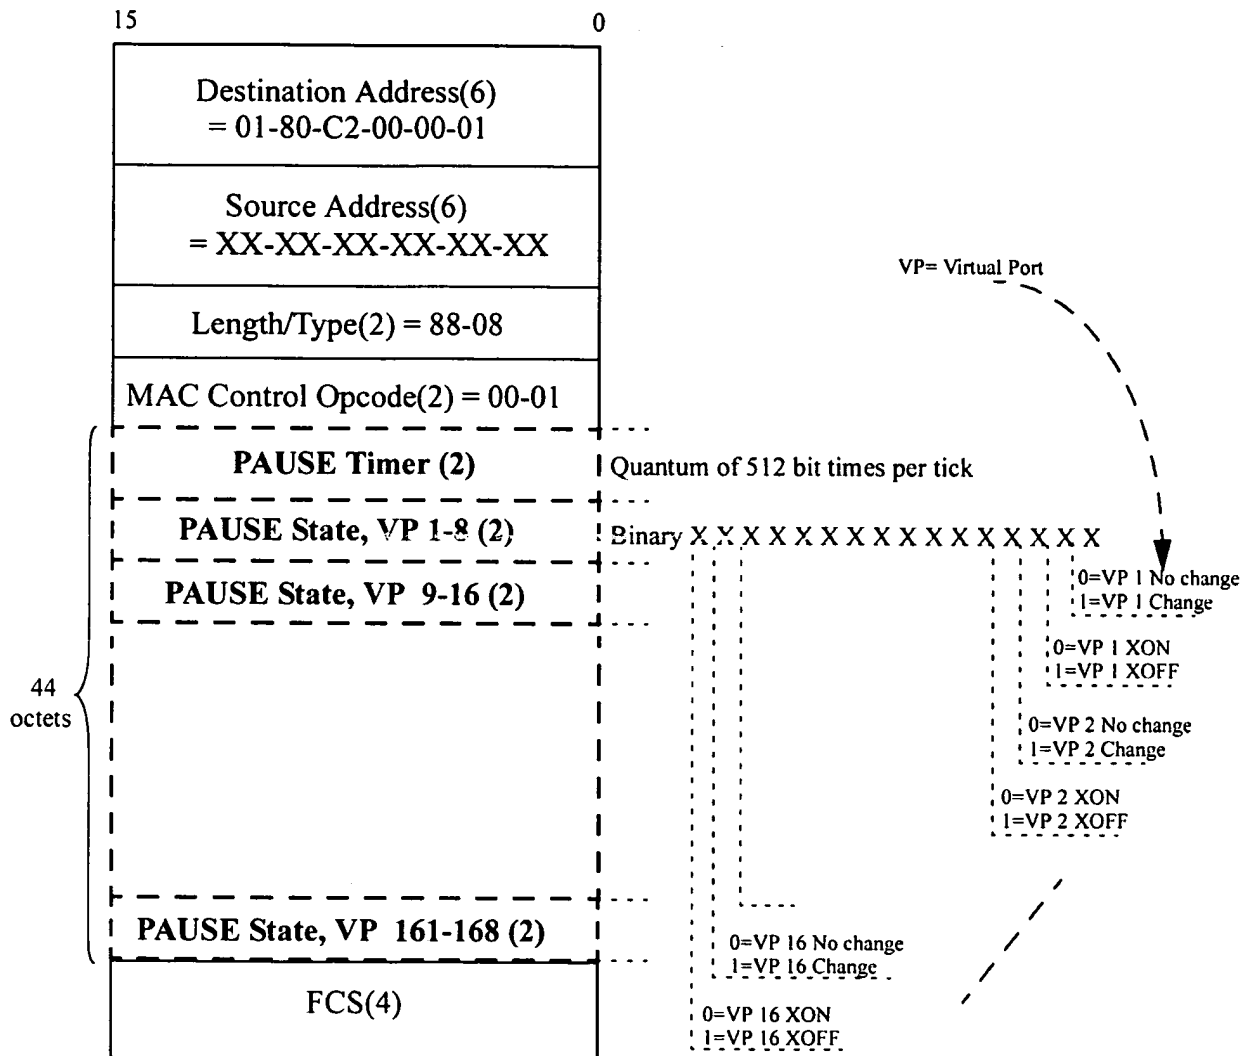


FIG. 9